VOCOOK

website:www.vocook.com

Gas Convection Oven HSD-101G

Standard Features

- Stainless steel front, sides and top
- Double-wall insulated cabinet construction
- Dual-speed convection fan for even heat distribution
- Electronic ignition system for reliable operation
- Temperature range: 150°F–500°F
- Five chrome-plated oven racks included
- Double-pane glass door with stainless steel handle
- Safety pilot with 100% flame failure protection
- 60-minute timer
- 3/4" NPT rear gas connection with regulator




Standard Acessories

- 5 chrome-plated oven racks
- Rack guides
- Gas pressure regulator
- LP conversion kit
- Adjustable legs
- Installation and operation manual


website:www.vocook.com

Gas Convection Oven HSD-101G


Dimensional Drawing

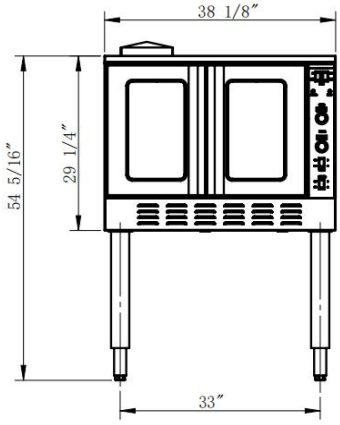

Front View

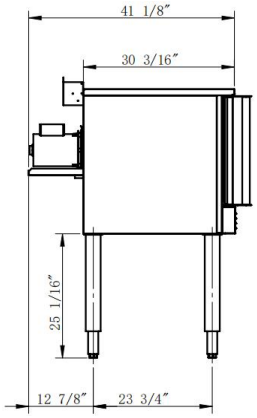

Side View

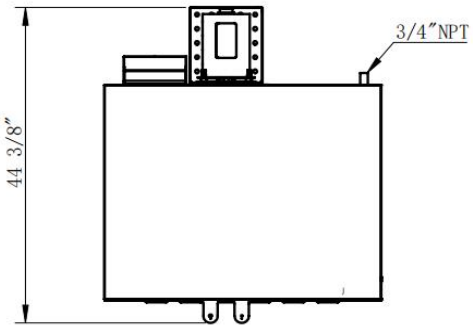

Top View

Specifications

Model	HSD-101G	
Gas Type	Naural Gas(NG)	Liquid Propane(LP)
Voltage	110V	
Power	887	
Burner	3 Count	
Single Burner Output	18,000 BTU/H	
Total Output	54,000 BTU/H	
Gas Inlet Pressure	4" W.C.	10" W.C.
Orifice Size	#33(Φ2.90mm)	#52(Φ1.68mm)
Exterior Dimension (WxDxH)	38.1" x 41.1" x 54.3"	
N.W.(lbs)	425	
G.W.(lbs)	542	