VOCOOK

website:www.vocook.com

Gas Fryer HSD-3P



Standard Features

● Durable stainless steel construction for both exterior and interior

● Seamless welded stainless steel fry tank

● High-performance burners with continuous pilot flame for reliable operation

● Precision millivolt thermostat (T-Stat) automatically maintains temperatures from 200°F to 400°F

● Automatic reset high-limit temperature protection device

● 1/2” NPT rear gas connection with regulator included

● Key components have CSA/ETL certificate.



Standard Acessories

● Two (2) nickel-plated fry baskets with heat-resistant coated handles

● Tool-free removable stainless steel basket hanger

● Extended drain pipe for convenient oil drainage

● Four (4) heavy-duty casters for easy mobility


C ETL LISTED US Intertek

ETL SANITATION LISTED Intertek


website:www.vocook.com

Gas Fryer HSD-3P


ensional Drawing

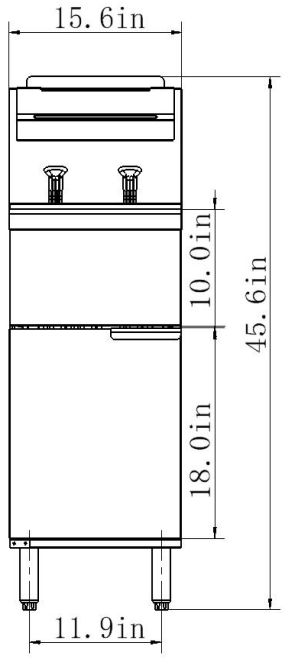

Front View

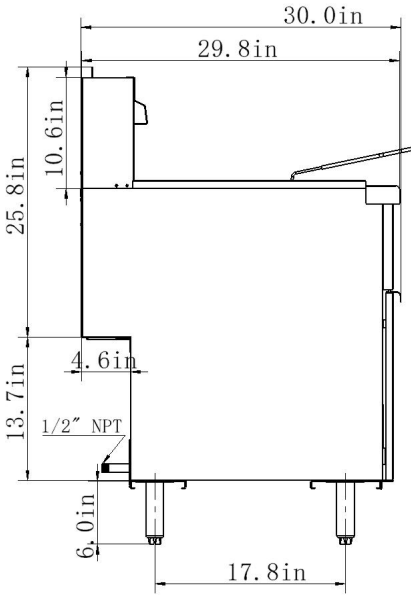

Side View

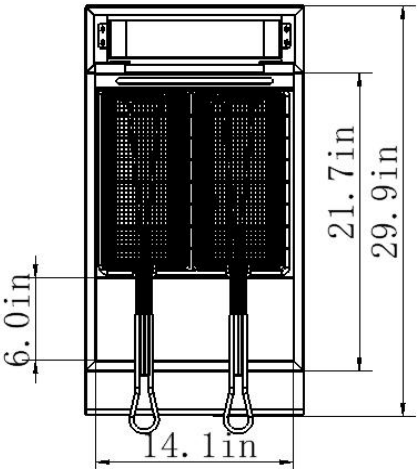

Top View

Specifications

Model		HSD-3-P
Burners		**3**
Power		90,000 BTU
Gas Supply		Propane
Manifold Pressure		10" W.C
Exterior Dimensions (inch)	**W**	15.6"
	D	30.0"
	H	45.6"
Basket Dimensions (inch)	**W**	6.5"
	D	13.2'
	H	5.9"
N.W.(lbs)		126
G.W.(lbs)		146