VOCOOK website:www.vocook.com

Gas Fryer HSD-5N



Standard Features

● Durable stainless steel construction for both exterior and interior

● Seamless welded stainless steel fry tank

● High-performance burners with continuous pilot flame for reliable operation

● Precision millivolt thermostat (T-Stat) automatically maintains temperatures from 200°F to 400°F



● Automatic reset high-limit temperature protection device

● 1/2” NPT rear gas connection with regulator included

● Key components have CSA/ETL certificate.

Standard Acessories

● Two (2) nickel-plated fry baskets with heat-resistant coated handles

● Tool-free removable stainless steel basket hanger

● Extended drain pipe for convenient oil drainage

● Four (4) heavy-duty casters for easy mobility


C ETL LISTED US Intertek

ETL SANITATION LISTED Intertek


VOCOOK website:www.vocook.com

Gas Fryer HSD-5N


Dimensional Drawing

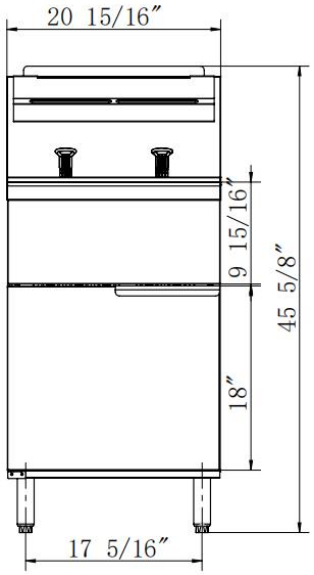

Front View

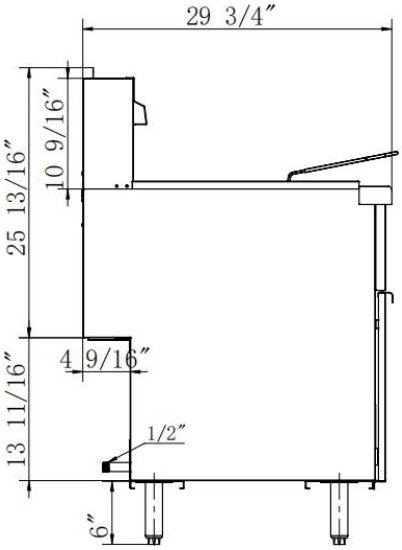

Side View

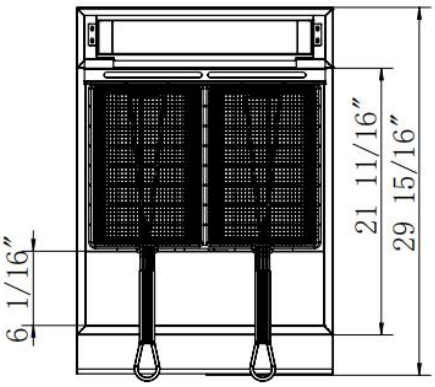

Top View

Specifications

Model		HSD-5N
Burners		**5**
Power		150,000 BTU
Gas Supply		Propane
Manifold Pressure		4" W.C
Exterior Dimensions (inch)	**W**	20.9"
	D	29.8"
	H	45.6"
Basket Dimensions (inch)	**W**	9.3"
	D	13.2'
	H	5.9"
N.W.(lbs)		161
G.W.(lbs)		180